

OPERATIONAL DATA MESSAGE VPF730 (Expanded Format)(Continued)

Explanation of message sub-strings:

Self-Test & Monitoring Values

c c c

			O = Other self-test values OK
			X = Other self-test fault exists
			O = Windows not contaminated
			X = Window contamination Warning
			F = Window contamination Fault

O = Sensor not reset since last "R?"

X = Sensor reset since last "R?"

Precipitation Type Codes


"NP "	No precipitation
"DZ- "	Light drizzle
"DZ "	Moderate drizzle
"DZ+ "	Heavy drizzle
"RA- "	Light rain
"RA "	Moderate rain
"RA+ "	Heavy rain
"SN- "	Light snow
"SN "	Moderate snow
"SN+ "	Heavy snow
"UP "	Indeterminate precipitation type
"GR "	Hail
"X "	Initial value or Error.

Obstruction to Vision Codes

" "	No Obstruction
"HZ"	Haze
"FG"	Fog

6.6 OPERATIONAL DATA MESSAGE VPF730 (Expanded Format)

Extended format sent when Operating State Word Bit is "0".
Sent automatically after calculation, when Operating State Word Bit is "1". Also sent in response to command "D?"

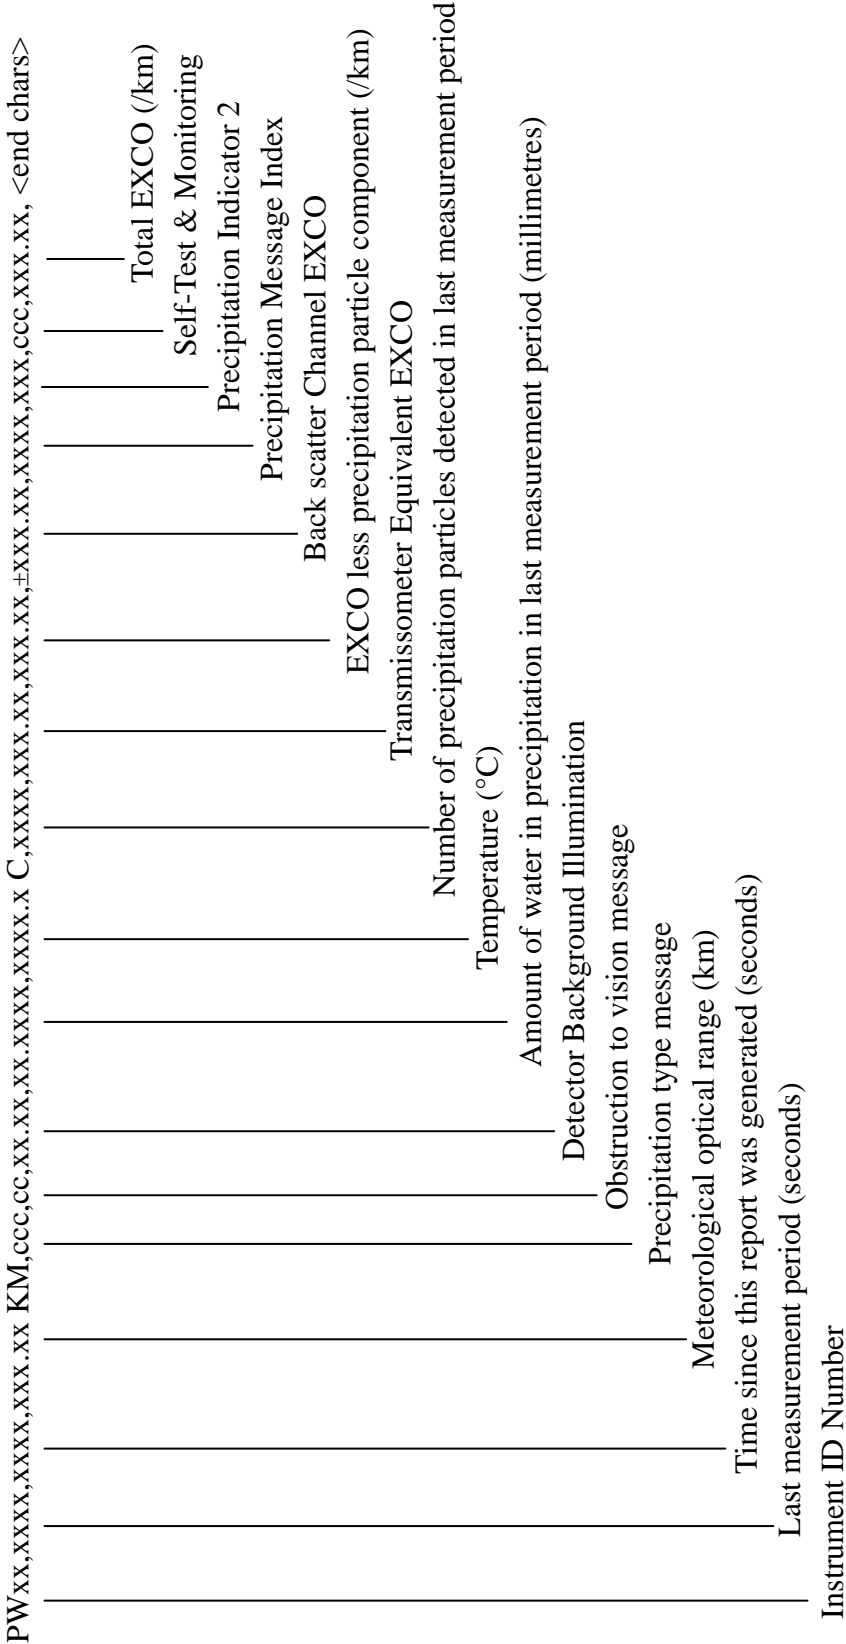

Note: See next page for definition of codes